

# Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/GB04/005211

International filing date: 08 December 2004 (08.12.2004)

Document type: Certified copy of priority document

Document details: Country/Office: GB  
Number: 0329034.3  
Filing date: 15 December 2003 (15.12.2003)

Date of receipt at the International Bureau: 18 January 2005 (18.01.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland  
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.


In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated


14 December 2004

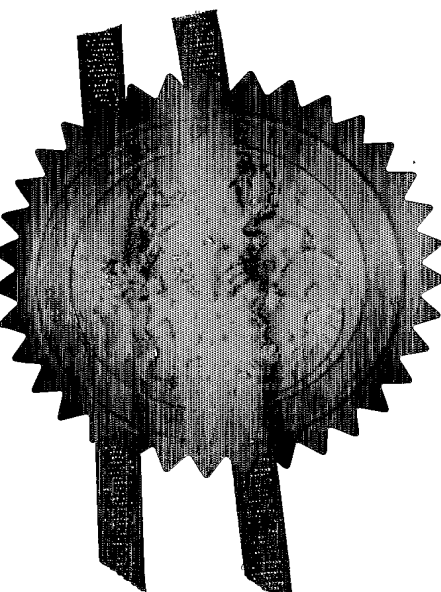






16DEC03 0859589-1 002805  
P01/7700 0.00-0329034.3 ACCOUNT CHA

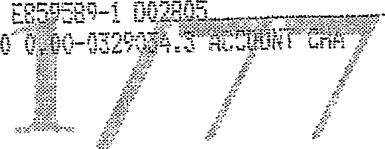

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

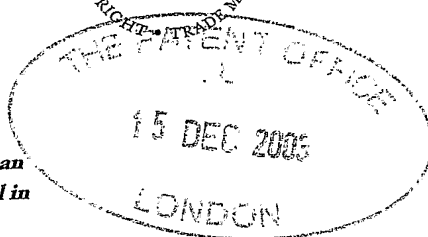

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference

M03B138/ASB

2. Patent application number

(The Patent Office will fill in this part)

0329034.3

3. Full name, address and postcode of the or of each applicant: (underline all surnames)

The BOC Group plc, Chertsey Road, Windlesham, Surrey, GU20 6HJ

Patents ADP number (if you know it)

884627002 7975969001

If the applicant is a corporate body, give the country/state of its incorporation

England

4. Title of the invention

VACUUM PUMPING ARRANGEMENT

5. Name of your agent (if you have one)

Andrew Steven BOOTH

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

The BOC Group plc, Chertsey Road, Windlesham, Surrey, GU20 6HJ

Patents ADP number (if you know it)

7975969001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

Yes

a) any applicant named in part 3 is not an inventor, or

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.

See note (d))

## Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

0

Description

9

Claim(s)

4

Abstract

1

Drawing(s)

6

10. If you are also filing any of the following, state how many against each item.

Priority documents

0

Translations of priority documents

0

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

0

Request for preliminary examination and search (*Patents Form 9/77*)

1

Request for substantive examination (*Patents Form 10/77*)

0

Any other documents (*please specify*)

0

11.

I/We request the grant of a patent on the basis of this application.

Signature

*A. S. Booth*

Date 15/12/2003

12. Name and daytime telephone number of person to contact in the United Kingdom

Andrew Steven Booth  
(01276) 807612

### Warning

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

### Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

# **VACUUM PUMPING ARRANGEMENT**

The invention relates to a vacuum pumping arrangement.

5 With reference to Figures 1 and 2, our earlier European patent application no. 0,805,275 describes a compound vacuum pump having a regenerative pumping mechanism 1 and a molecular drag (Holweck) mechanism 2. Mounted within the pump housing 3 between bearings 4,5 is a shaft 6. The shaft 6 is adapted for rotation about its longitudinal axis and is driven by an electrical motor 7.  
10 surrounding the shaft 6.

The regenerative stage 1 comprises a rotor 9 mounted on the shaft 6. The rotor 9 is in the form of a circular disc, the lower surface of which presents a substantially flat surface on which are positioned integrally therewith a plurality (six) of raised  
15 rings 10, 11, 12, 13, 14, 15 situated symmetrically on the rotor about its centre point. Mounted on each of the raised rings is a series of equally spaced blades B, for example, one hundred blades on each ring to form concentric annular arrays of blades. The width of each ring, and the corresponding size of the blades on each ring, gradually decreases from the outermost ring 15 to the innermost ring 10.  
20 Each of the blades is slightly arcuate with the concave side pointing in the direction of travel of the rotor.

The body portion 16 of the housing 3 forms the stator and contains six circular channels in its upper surface which are of "keyhole" cross section and are of a  
25 size which closely accommodates in the rectangular section upper parts the six raised rings 10, 11, 12, 13, 14, 15; the circular section lower (as shown) parts accommodate the corresponding blades of the relevant raised ring. Each channel has a reduced cross sectional area (not shown) for a small part of its length of a shaped size substantially the same as that of the corresponding blades  
30 accommodated therein. This reduced cross sectional part of each channel forms the "stripper" which, in use, urges gas passing through that channel to be deflected by porting (not shown) in to the next (inner) channel until being

exhausted from the pump via the bores 32, 33 in the body portion 16.

This arrangement allows for radial sealing between the rotor and stator of the regenerative mechanism. In this respect, the radial sealing occurs between the sides of the raised rings 10, 11, 12, 13, 14, 15 and the corresponding sides of the rectangular cross sectional part of the relevant channel, ie at 17, 18, especially the outermost sides 18, as shown in respect of the ring 10 only to aid clarity in the drawings, due to thermal expansion of the rotor 9 during use of the pump.

However, in view of the close tolerances required to effect such radial sealing, any dust or other debris which might accumulate on the outermost sides of the channels 18 through the action of centrifugal forces could, if allowed to build up, cause the pump to seize.

In at least its preferred embodiment, the present invention seeks to solve this and other problems.

In one aspect, the present invention provides regenerative pumping mechanism comprising a rotor having a series of blades positioned in an annular array on one side of the rotor, a stator having an annular channel within which the blades rotate, and means for actively controlling relative axial movement between the rotor and the stator so as to control the axial clearance between the rotor and the stator.

By controlling the axial clearance between the rotor and the stator, controllable axial sealing can be provided between the rotor and the stator. As a consequence, there is no longer any requirement to provide radial sealing, thereby avoiding the aforementioned problem associated therewith; any dust or debris in the pumped gases can migrate away under centrifugal forces rather than becoming trapped between any radial seals.

In a preferred embodiment, the means for actively controlling relative axial movement comprises an axial magnetic bearing for controlling axial movement of the rotor relative to the stator.

Preferably, the axial magnetic bearing comprises an electromagnet arranged to draw the rotor towards the stator, and thereby achieve accurate control of the axial clearance between the rotor and stator, typically to a precision less than  $10\mu\text{m}$ .

5 To minimise pump length, the electromagnet may be conveniently mounted on the stator.

Preferably, the electromagnet is supplemented by a second electromagnet arranged to draw the rotor away from the stator, thereby improving control of the  
10 axial clearance. The axial magnetic bearing preferably comprises a magnetic bearing rotor, the magnetic bearing rotor and the rotor of the regenerative mechanism being located on a common shaft, the magnetic bearing rotor being located between the electromagnets. A control device may be arranged to control the strength of the magnetic field generated by the electromagnet(s) and thus the  
15 axial position of the rotor relative to the stator.

In an alternative embodiment, the means for actively controlling axial movement comprises AN actuator, for example, a linear actuator, actuable to control the axial  
position of the rotor, for example, by moving a rolling bearing supporting the drive  
20 shaft. As the overall extent of the relative movement of the rotor and stator may be less than  $50\mu\text{m}$ , the actuator may conveniently comprise a magnetic shape memory material, with a control device arranged to control the strength of a magnetic field applied to the actuator being provided, thereby accurately controlling the length of the actuator and thus the axial position of the rotor relative  
25 to the stator.

In a preferred arrangement, the arrangement comprises means for detecting the axial position of the rotor relative to the stator and means for controlling the means for actively controlling relative axial movement in response to the detected  
30 position.



A back-up bearing may be provided to limit the amount of relative movement between the rotor and the stator.

5 At least one of the rotor and the stator is formed from, or coated with, a wear-resistant, or self-lubricating, material to minimise damage in the event of contact between the rotor and the stator.

10 In a preferred embodiment, the rotor has at least two series of blades positioned in concentric annular arrays on the side of the rotor and the stator has a corresponding number of channels within which the blades of the arrays can rotate and means are provided to link the channels to form a continuous passageway through which fluid can pass.

15 As radial sealing can be dispensed with, a drive shaft for driving the mechanism may be supported at each end thereof by a lubricant free bearing, such as a magnetic bearing. Providing full magnetic support for the drive shaft had previously been difficult in view of the requirement for the radial running clearances for the radial seals to be less than 0.1mm; typical back-up bearing clearances are greater than 0.15mm.

20

The present invention also provides a pumping arrangement comprising a regenerative pumping mechanism as aforementioned. The arrangement may comprise means for controlling the axial clearance between the rotor and the stator and so control the pressure in a chamber connected to the pumping arrangement. For example, the axial clearance may be increased so that one or more of the stages of the pumping mechanism leak pumped fluid back to the previous stage. During roughing of the chamber, control of the axial clearance can allow a greater rate of fluid flow past the otherwise restrictive exhaust stages of the regenerative mechanism, thereby improving pumping speed.

30

Thus, in another aspect the present invention provides pumping arrangement for controlling pressure in a chamber, the arrangement comprising a regenerative

pumping mechanism comprising a rotor having a series of blades positioned in an annular array on one side of the rotor, and a stator having an annular channel within which the blades rotate; and means for effecting axial movement of the rotor during use of the pump to control the axial clearance between the rotor and the stator and so control the pressure in the chamber.

Preferred features of the present invention will now be described, by way of example only, with reference to the accompanying drawing, in which:-

10 Figure 1 is a sectional view through a representation of a prior vacuum pumping arrangement having both regenerative and Holweck stages;

Figure 2 is an enlarged sectional view of the representation shown in Figure 1;

15 Figure 3 is a section view through a representation of a vacuum pumping arrangement of the invention;

Figure 4 is an enlarged sectional view of the representation shown in Figure 3;

20 Figure 5 is an enlarged section view of a pumping stage of the regenerative pumping mechanism of the pumping arrangement of Figure 3; and

Figure 6 illustrates a chamber pressure control mechanism.

25 With reference to Figure 3, a vacuum pumping arrangement 100 comprises a molecular pumping mechanism 102, which may comprise one or both of a turbomolecular pumping mechanism and a molecular drag pumping mechanism, and a regenerative pumping mechanism 104. The inlet 105 of the pumping arrangement may be in fluid connection with a semiconductor processing chamber  
30 in which a clean environment is required. In use, gas in molecular flow conditions is drawn in through the inlet to the molecular pumping mechanism 102 which urges molecules into the regenerative pumping mechanism 104. Gas is

exhausted at atmospheric pressure or thereabouts through an exhaust (not shown).

The pumping mechanisms are housed in a housing, which is formed in three separate parts 106, 108, 110. Part 106 forms the inner surfaces of the molecular pumping mechanism 102, and part 108 forms the stator of the regenerative pumping mechanism 104. Part 110 defines a recess 112 for receiving a radial magnetic bearing 114 for supporting one end of a drive shaft 116. The magnetic bearing 114 may be an active bearing, using electromagnets, or a passive bearing, using permanent magnets. A back-up bearing 118 may also be provided to prevent excess radial movement of the shaft 116 in the event of, say, power failure. The other end of the drive shaft 116 is also supported by a radial magnetic bearing 115 and a back-up bearing 119.

Drive shaft 116 is driven by motor 120. The motor 120 may be supported at any convenient position in the vacuum pumping arrangement. The motor is adapted to be able to drive simultaneously the molecular pumping mechanism 102 and the regenerative pumping mechanism 104. As a regenerative pumping mechanism generally requires more power for operation than a molecular pumping mechanism in view of the regenerative pumping mechanism operating at pressures close to atmosphere where windage and air resistance is relatively high, the motor is selected for powering the regenerative pumping mechanism 104.

The regenerative pumping mechanism 104 comprises a stator 108 and a rotor 122. The stator has a plurality of linked circumferential pumping channels 124 disposed concentrically about the longitudinal axis A of the drive shaft 116. The rotor 124 is mounted to, or integral with, the drive shaft 116, and comprises a plurality of arrays of rotor blades B extending axially into respective circumferential pumping channels 126. In the embodiment shown in Figure 3, the regenerative pumping mechanism 104 comprises seven pumping stages, for each stage a circumferential array of rotor blades B extending into a respective channel. During operation, the drive shaft 116 rotates the rotor 122, which causes the rotor

blades B to travel along the pumping channels, pumping gas from an inlet (not shown), through each of the pumping stages in turn (from the outermost stage to the innermost stage) to an outlet (not shown) where the pumped gas is exhausted at a pressure close to or at atmospheric pressure.

5

An enlarged cross-section of the regenerative pumping mechanism 104 is shown in Figure 4. Each circumferential array of blades B is mounted on a respective raised ring 128 of the lower surface 130 of the rotor 122, the height of the raised rings 128 being much smaller than that of the raised rings 10, 11, 12, 13, 14, 15 of the prior regenerative mechanism 1 shown in Figure 2. As known, each channel has a reduced cross sectional area (not shown) for a small part of its length of a shaped size substantially the same as that of the corresponding blades accommodated therein. This reduced cross sectional part of each channel forms the "stripper" which, in use, urges gas passing through that channel to be deflected by porting (not shown) in to the next (inner) channel until being exhausted from the pumping arrangement 100.

In contrast to the regenerative pumping mechanism 1 of Figure 2, the regenerative pumping mechanism 104 of the pumping arrangement 100 does not employ radial sealing between the rotor and stator, but instead relies on axial sealing. With reference to Figure 5, for efficient operation of the regenerative pumping mechanism 104, it is important that the axial clearance "C" between the lower surface 130 of the rotor 122 and upper surface 132 of the stator 108 is closely controlled, and preferably kept to no more than 200  $\mu\text{m}$  or less, and preferably less than 80  $\mu\text{m}$ , during operation. An increase in clearance "C", for example, due the application by the pumped gas of an axial load on the rotor 122 tending to push the rotor 122 away from the stator 108, would lead to significant seepage of gas out of the pumping channels 126 and vary the pumping performance of the regenerative pumping mechanism 104.

30

In order to actively control the axial clearance C between the rotor 122 and the stator 108, and thus control the pumping performance, the pumping arrangement

100 includes an axial magnetic bearing 140. With reference to Figure 4, the axial magnetic bearing 140 comprises a magnetic bearing rotor 142 mounted on, or integrally formed with, the drive shaft 116, the magnetic bearing rotor 142 being located between a first electromagnet 144 and a second electromagnet 146 mounted in the stator 108. Using a control device 150 (as shown in figure 6), the voltage applied to the electromagnets is selectively controlled to adjust the position of the magnetic bearing rotor 142 between the electromagnets 144, 146, thereby controlling the axial position of the rotor 122 relative to the stator 108 and thus the size of the axial clearance C. In the arrangement shown in Figure 4, increasing the voltage applied to the first electromagnet 144 tends to draw the rotor 122 towards the stator 108, whilst increasing the voltage applied to the second electromagnet 146 tends to draw the rotor 122 away from the stator 108.

A positional sensor 152 can be used to detect the axial position of the rotor 122 (or drive shaft 116) and output signals indicative of the position of the rotor 122 to the control device 150 to enable the magnitude of the voltages applied to the electromagnets 144, 146 to be varied as required to control the axial clearance C. Additionally, or alternatively, the pressure in the chamber 160 being evacuated by the pumping arrangement 100 can be measured using gauge 170, for example, a Pirani gauge. The gauge 170 outputs a signal indicative of the pressure in the chamber 160. This signal is fed into a control device 150, which uses the signal to provide a comparison between the current pressure in the chamber 160 and the desired pressure. Depending on the result of the comparison, the control device 150 can adjust the axial clearance C to control the rate of flow of fluid through the regenerative pumping mechanism (for example, by increasing the axial clearance C so that the pumped gas is caused to by-pass the stages of the regenerative pumping mechanism 104) and thereby adjust the pressure in the chamber 160. This can be particularly useful during roughing of the chamber 160 from atmospheric pressure, where increasing the axial clearance C can allow for an increased rate of fluid flow past the otherwise restrictive exhaust stages.

In the event that the rotor 122 and stator 108 come into contact, a combination of hard coatings and self-lubricating materials can be used for the surfaces 130, 132 of the rotor 122 and stator 108 to allow contact to occur without damage and only minimal wear.

5

In summary, a regenerative pumping mechanism comprises a rotor having a series of blades positioned in an annular array on one side of the rotor, and a stator having an annular channel within which the blades rotate. In order to control the axial clearance between the rotor and the stator, an axial magnetic bearing actively control relative axial movement between the rotor and the stator. This can allow the pumping mechanism to provide controllable axial sealing between the rotor and the stator, as opposed to radial sealing.

10

It is to be understood that the foregoing represents one embodiment of the invention, others of which will no doubt occur to the skilled addressee without departing from the true scope of the invention as defined by the claims appended hereto.

15

For example, in an alternative embodiment a linear actuator may be used to control the axial position of the rotor 122 relative to the stator 108. The actuator may be located, for example, axially between the drive shaft 116 and back-up bearing 118, and actuated to adjust the axial position of the drive shaft 116, for example by controlling the position of bearing 118. The actuator may take any convenient form. For example, the actuator may be in the form of a linear actuator formed from magnetic shape memory material, the length of which varies in relation to the strength of a magnetic field applied thereto by a surrounding electromagnet. The control device 150 may be configured to control the voltage supplied to this electromagnet in order to control the length of the actuator and thus the axial position of the rotor relative to the stator.

20

25

30

**CLAIMS**

1. A regenerative pumping mechanism comprising a rotor having a series of blades positioned in an annular array on one side of the rotor, a stator having an annular channel within which the blades rotate, and means for actively controlling relative axial movement between the rotor and the stator so as to control the axial clearance between the rotor and the stator.

2. A mechanism according to Claim 1, wherein the means for actively controlling relative axial movement comprises an axial magnetic bearing for controlling axial movement of the rotor relative to the stator.

3. A mechanism according to Claim 2, wherein the axial magnetic bearing comprises at least one electromagnet arranged to draw the rotor towards the stator.

4. A mechanism according to Claim 3, wherein the electromagnet is mounted on the stator.

5. A mechanism according to Claim 3 or Claim 4, wherein the axial magnetic bearing comprises at least one second electromagnet arranged to draw the rotor away from the stator.

6. A mechanism according to Claim 5, wherein the axial magnetic bearing comprises a magnetic bearing rotor, the magnetic bearing rotor and the rotor of the regenerative mechanism being located on a common shaft, the magnetic bearing rotor being located between the first and second electromagnets.

7. A mechanism according to any of Claims 3 to 6, comprising a control device arranged to control the strength of the magnetic field generated by the electromagnet(s) and thus the axial position of the rotor relative to the stator.

5

8. A mechanism according to Claim 1, wherein the means for actively controlling axial movement comprises an actuator actuable to control the axial position of the rotor.

10

9. A mechanism according to Claim 8, wherein the actuator comprises magnetic shape memory material.

10. A mechanism according to Claim 9, comprising a control device arranged to control the strength of a magnetic field applied to the actuator so as to control the shape of the actuator and thus the axial position of the rotor relative to the stator.

15

11. A mechanism according to Claim 7 or Claim 10, wherein the control device comprises means for detecting the axial position of the rotor relative to the stator and means for controlling the means for actively controlling relative axial movement in response to the detected position.

20

12. A mechanism according to any preceding claim, comprising means for limiting the amount of relative movement between the rotor and the stator.

25

13. A mechanism according to any preceding claim, wherein at least one of the rotor and the stator is formed from, or coated with, a wear-resistant material to minimise damage in the event of contact between the rotor and the stator.

30



14. A mechanism according to any preceding claim, wherein the rotor has at least two series of blades positioned in concentric annular arrays on a side of the rotor and the stator has a corresponding number of channels within which the blades of the arrays can rotate and means are provided to link the channels to form a continuous passageway through which fluid can pass.
15. A mechanism according to any preceding claim, comprising a drive shaft for driving the mechanism.
16. A mechanism according to Claim 15, wherein the drive shaft is supported at each end thereof by a lubricant free bearing.
17. A mechanism according to Claim 16, wherein each lubricant free bearing comprises a magnetic bearing.
18. A mechanism according to any of Claims 15 to 17, wherein the drive shaft is additionally supported at each end by a rolling bearing.
19. A mechanism according to any of Claims 15 to 18, wherein the means for actively controlling relative axial movement is arranged to control axial movement of the drive shaft and thereby control the axial position of the rotor relative to the stator.
20. A mechanism according to Claims 18 and 19, wherein the means for actively controlling relative axial movement is arranged to axially move a said rolling bearing to control the axial position of the drive shaft.
21. A pumping arrangement comprising a regenerative pumping mechanism according to any preceding claim.

22. A pumping arrangement according to Claim 18, comprising means for controlling the axial clearance between the rotor and the stator and so control the pressure in a chamber connected to the pumping arrangement.

5 23. A pumping arrangement for controlling pressure in a chamber, the arrangement comprising a regenerative pumping mechanism comprising a rotor having a series of blades positioned in an annular array on one side of the rotor, and a stator having an annular channel  
10 within which the blades rotate; and means for effecting relative axial movement between the rotor and the stator during use of the pump to control the axial clearance between the rotor and the stator and so control the pressure in the chamber.

15 24. An arrangement according to Claim 23, comprising a drive shaft for driving the mechanism, the means for actively controlling relative axial movement being arranged to control axial movement of the drive shaft and thereby control the axial position of the rotor relative  
20 to the stator.

25 25. An arrangement according to Claim 23 or Claim 24, wherein the means for effecting relative axial movement comprises an axial magnetic bearing for controlling axial movement of the rotor relative to the stator.

26. An arrangement according to Claim 23 or Claim 24, wherein the means for effecting relative axial movement comprises an actuator actuatable to control the axial position of the rotor relative to the stator.

30 27. An arrangement according to Claims 24 and 26, wherein the actuator is arranged to move a bearing for supporting the drive shaft.

**ABSTRACT**

- 5 A regenerative pumping mechanism comprises a rotor having a series of blades positioned in an annular array on one side of the rotor, and a stator having an annular channel within which the blades rotate. In order to control the axial clearance between the rotor and the stator, an axial magnetic bearing actively control relative axial movement between the rotor and the stator. This can allow
- 10 the pumping mechanism to provide controllable axial sealing between the rotor and the stator, as opposed to radial sealing.

(figure 3)


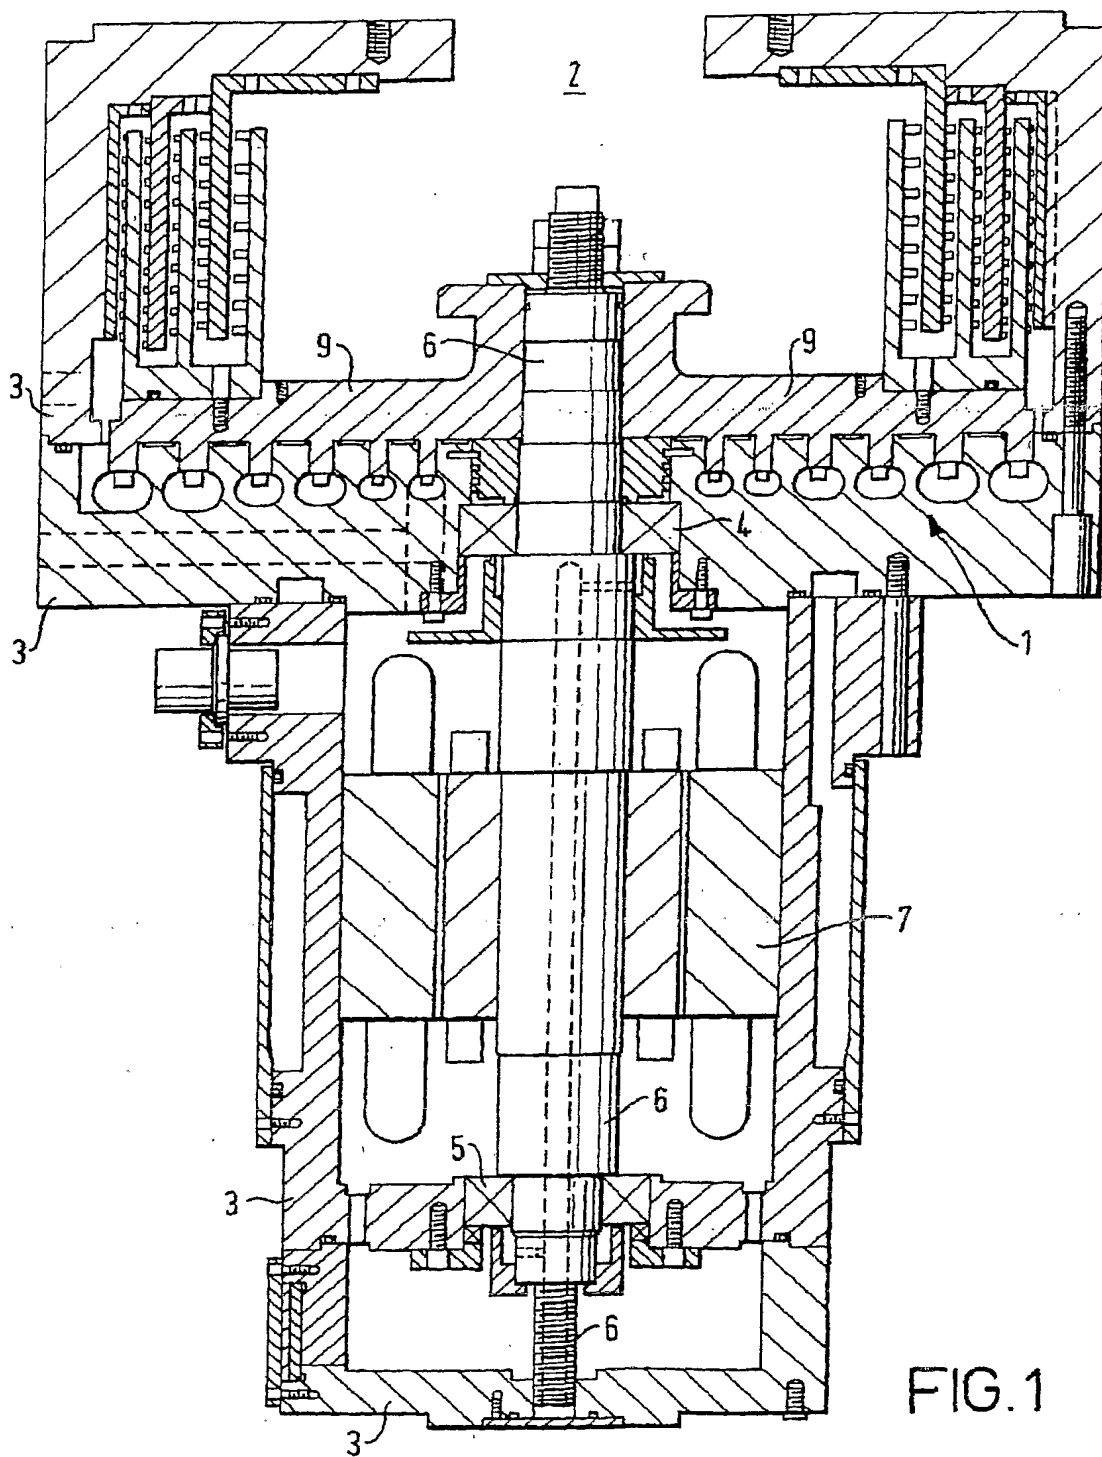


FIG. 1

(PRIOR ART)





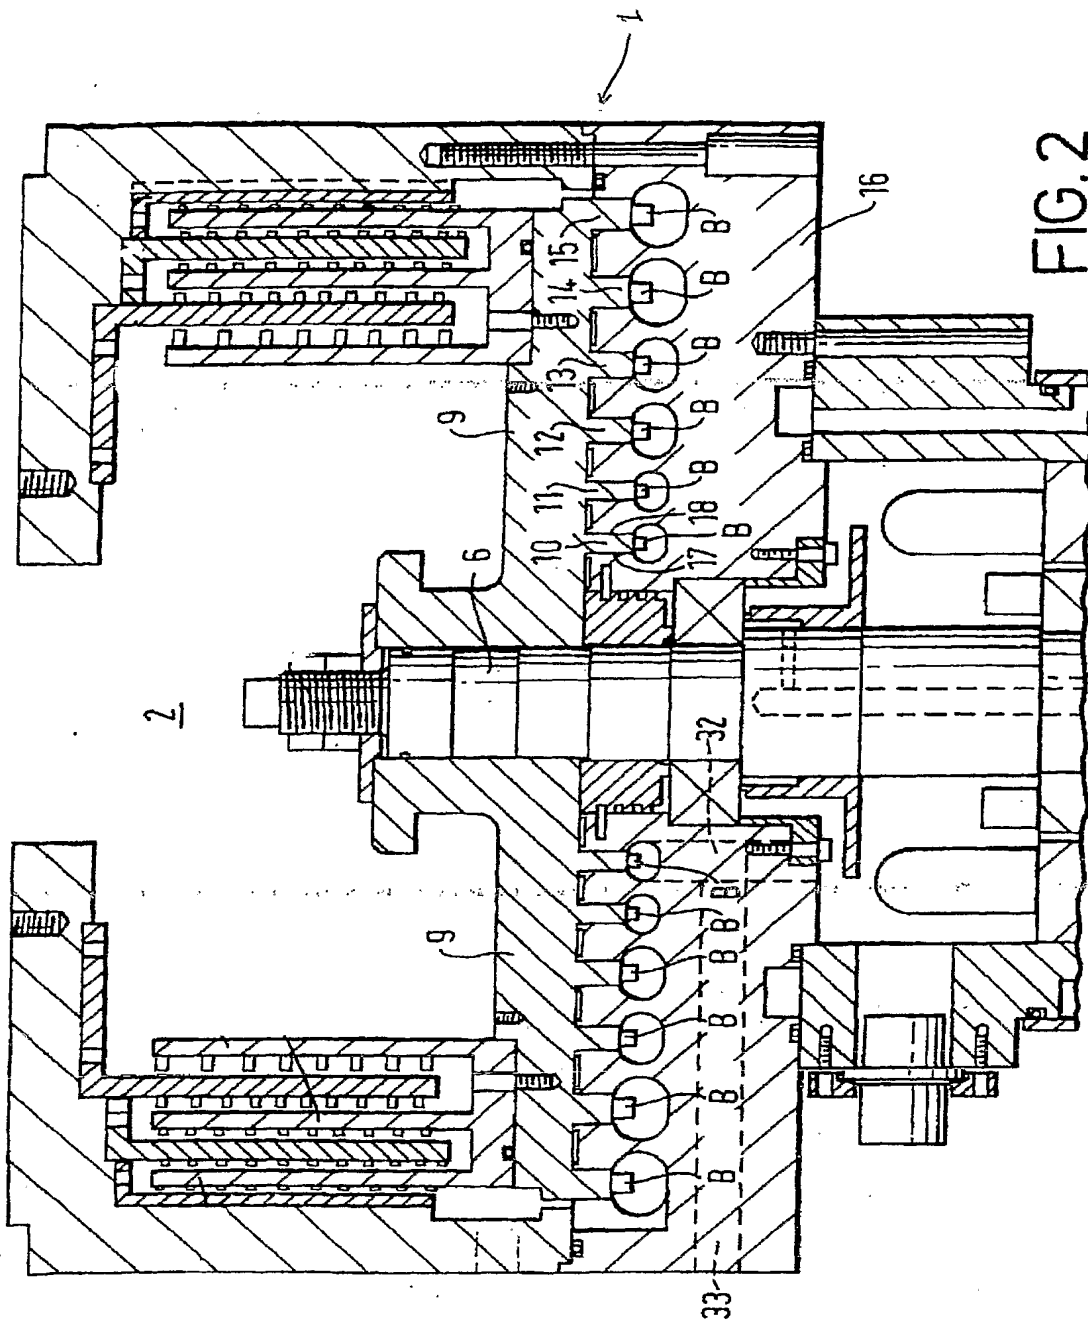







10-11

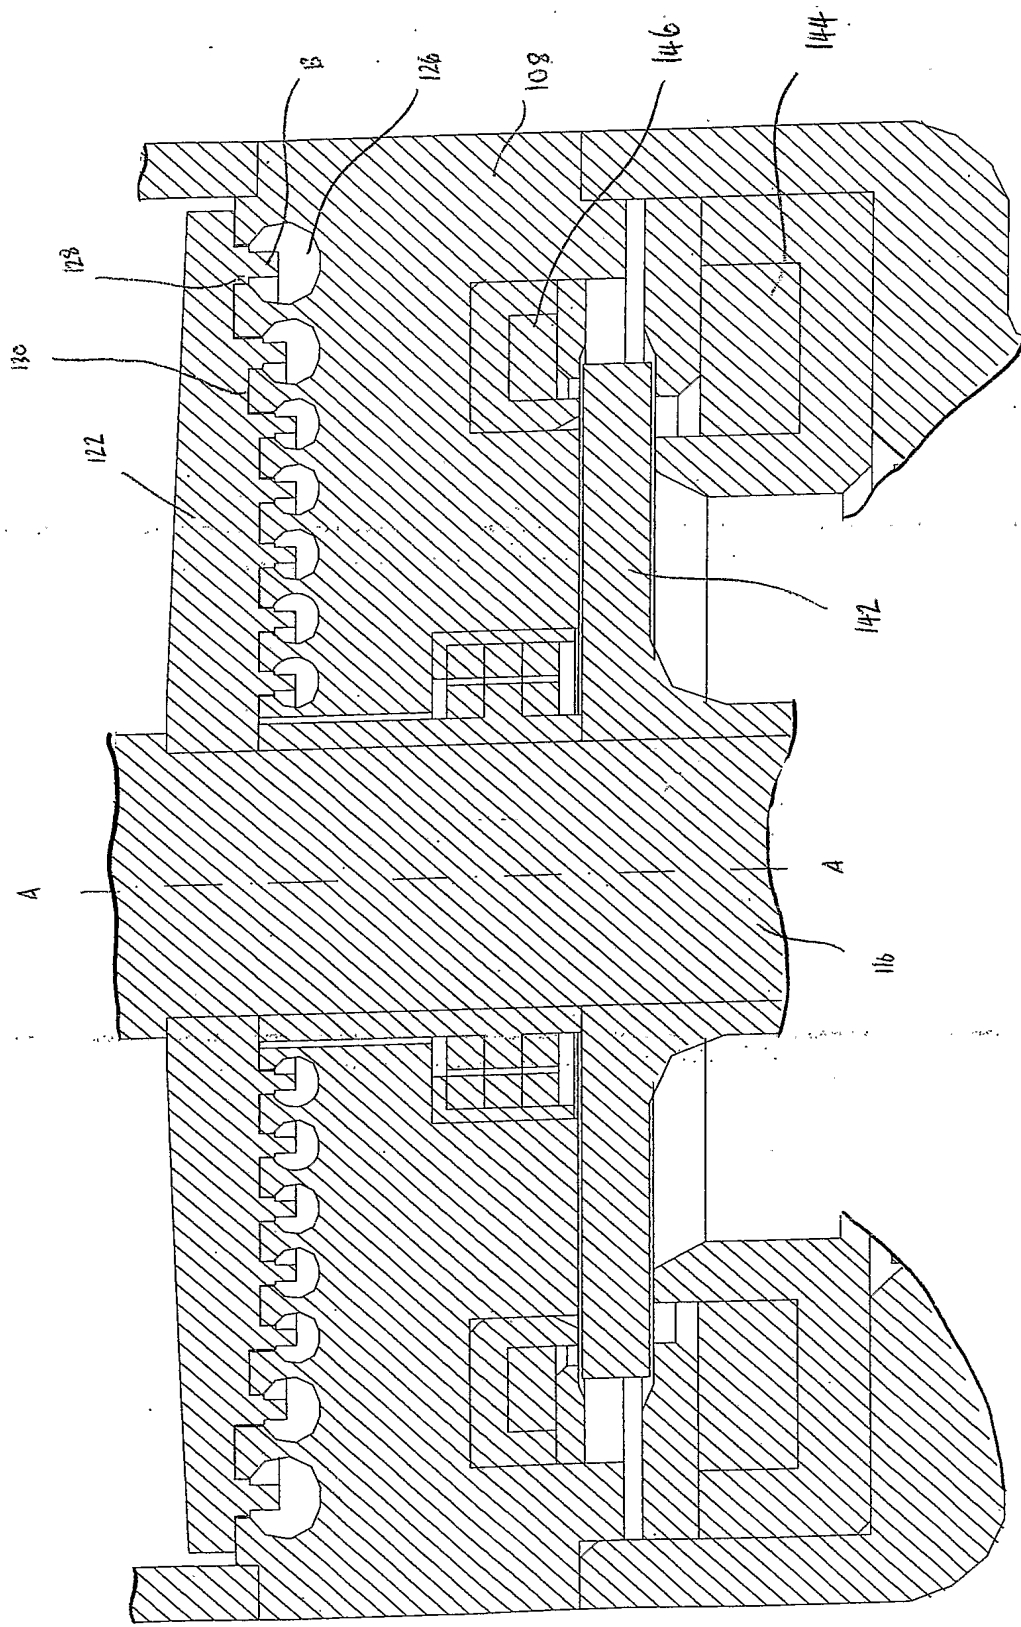


FIG. 4



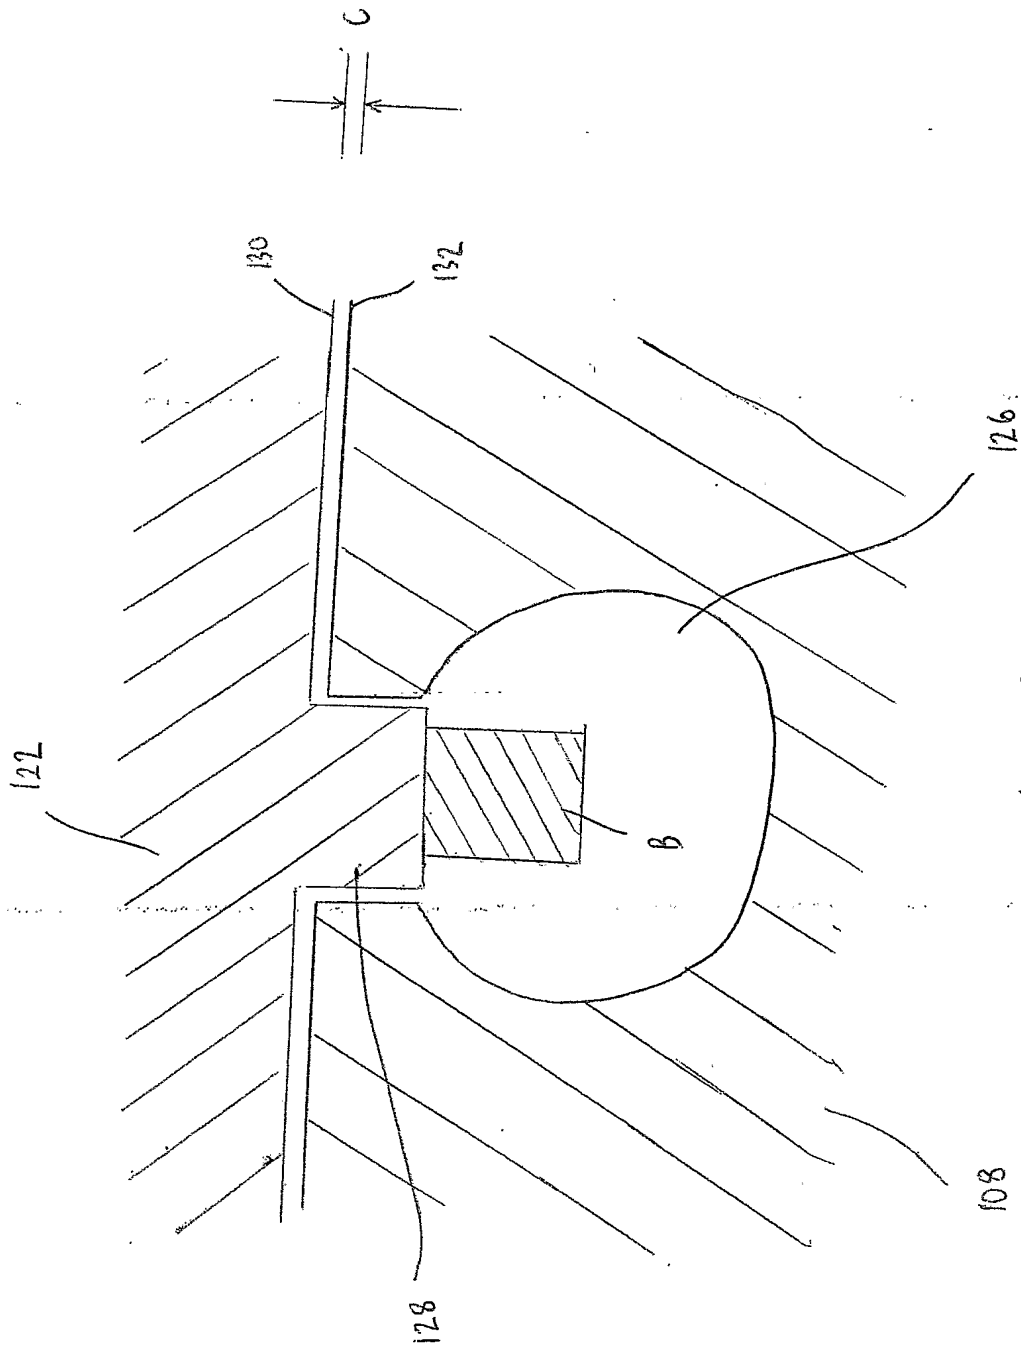


FIG. 5



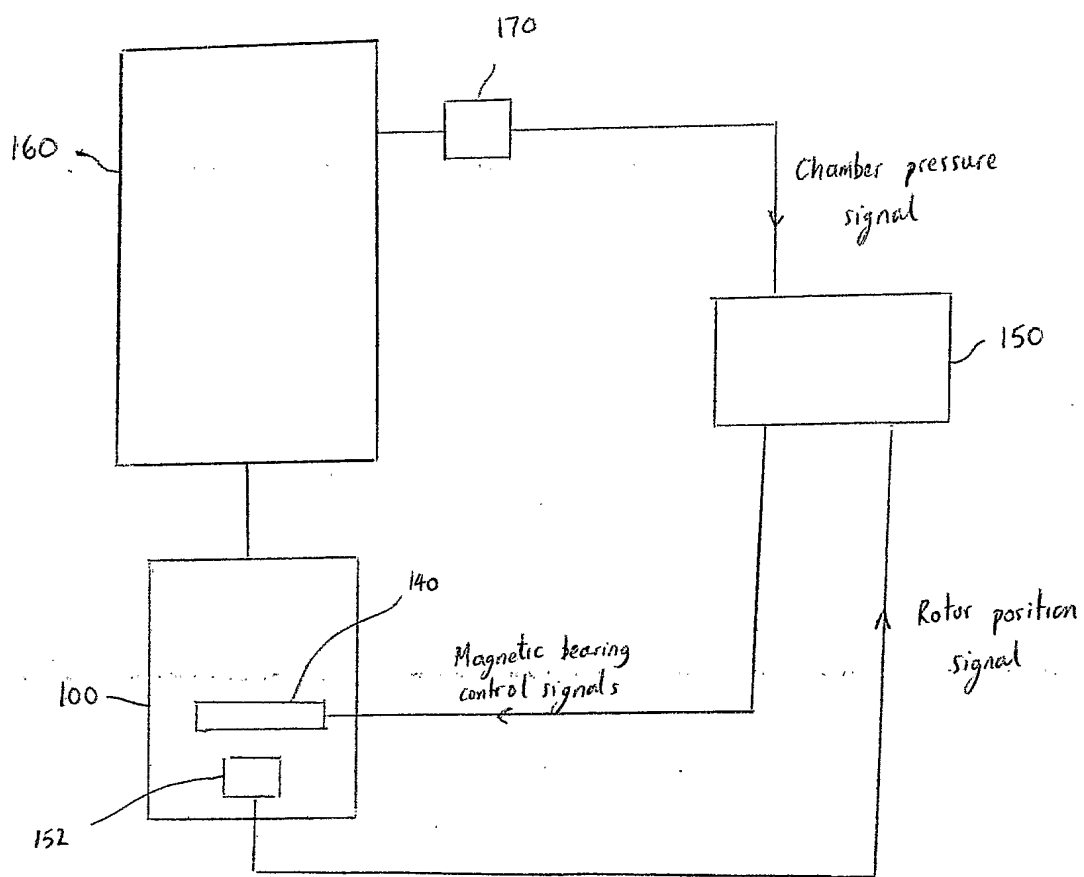


FIG. 6

